


Walk In Tub


OHT 5129 Easy Access Out Swing Door



Right Hand Shown

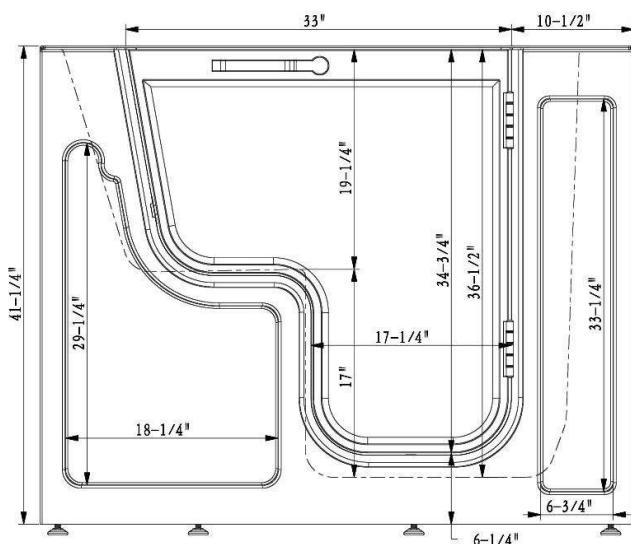

Front View

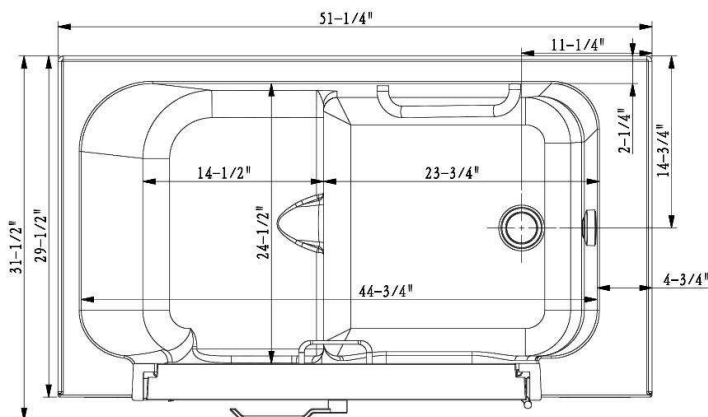

Top View

In an effort to continually improve our product, specifications and configurations are subject to change without notice.

OHT 5129 / 05.22 (77)

GENERAL SPECIFICATIONS

Dimensions51¼"×31½"×41¼"
Weight260 lbs.
Unoccupied capacity90-95 gallons

Features:

PVC Drain

- Size - 2"
- Horizontal or Vertical
- Plunger with Chain

Door

- Opening Width - 33"
- Door Opening Clearance Height - 22 ¼"
- Patented Door System Technology
- Aluminum Door and Frame

Acrylic Shell

- White Textured Acrylic
- White Smooth Acrylic
- Non-skid Floor
- ADA Height Seat
- Acrylic Surface with Fiberglass Substrate
- Two Grab Bars
- Stainless Steel Frame
- Front Deck for Faucet Locations

Options

- Left or Right Hand Drain
- Water Jetting System
- Micro-bubbles System
- Loaded Jetted Package

Accessories

- Tub Extension Panel Kit
- Back Wall Extension Panel Kit
- End Panel Kit

Compliance Certifications - Meets or Exceeds the Following Specifications:

- cETL - Intertek
- cUPC / USPC - IAPMO
- ANSI Z 124.1.2 - for Plastic Bathtubs
- ASME A 112.19.7 - Whirlpool Appliances
- ASME A 122.19.15 - for Walk In Bathtubs
- CSA B45.4 - Canadian Plumbing Fixtures

MAX. FUSE AMPS OR MAX. CIRCUIT BREAKER 20 AMPS

Before ordering or installing, consider future access to essential equipment.